


2500A NRT Display Unit

The Neon NRT Display Unit is a compact display and operating button unit designed to connect to existing Neon Remote Terminals (NRTs) and Neon Remote Modules (NRMs) to assist with field operations internet connection.

The display provides a limited subset of indicators available via the Starlog 4 support software.

The display unit connects to the RS232 port on the NRT or NRM. The buttons and the corresponding sample displays available are detailed below.

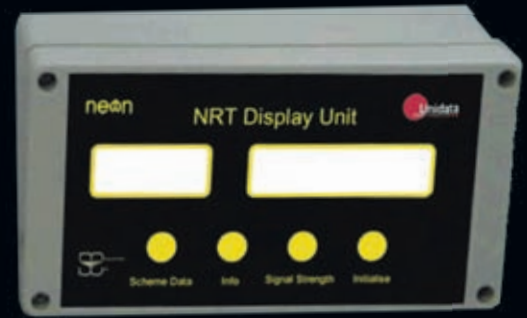

Info Button

- NRT Details
- NRT ID e.g. 1000
- Server IP Address e.g. 101.101.101.101
- Access Pt Name e.g. "internet"
- NRT ESN e.g. 5000
- NRT Firmware Version e.g. 21V2_21.>1
- NRT Details
- NRT_LCD Ver e.g. 0.02

Signal Strength Button

- Signal strength
- Please Wait
- No Signal
- Very Low Signal
- Low Signal
- Good Signal

Initialise Button

- Wait initialising
- Please wait
- Wait registering
- Registered OK
- Starting IP Comms
- Initialised OK
- Ending Task

